



Inspiring Hardware Globally

FURNITURE & DOOR HARDWARE

Booth: **11.1D47-48**

CANTON FAIR

Dates: October 15-19



21+ Years Global B2B Experience

Strong China Supply Chain

OEM / ODM Customization

Product Development

Stable Quality & QC System

Complete Hardware Solutions

01 **HB319** Ultra-thin hydraulic hinge with cover

02 **HB310** Air hinge for aluminum frame & glass doors

03 **HT901** Soft Close Thin Metal Box

04 **BF3318K** 5D heavy duty cabinet drawer slides with Synchronize

05 **B505K** 3-Fold Soft Close Undermount Drawer Slide

06 **BF3331K** Synchronized Full-Extension Soft Close Undermount Drawer Slide

07 **M972** Adjustable Ghost Door System

08 **BS07** Monoraol Flush Sliding Door System

09 **M75G** Pocket Sliding Door System

10 **TM037** Folding Wardrobe Door System

11 **HY602** Wooden Door Hydraulic Hinge

12 **HBG005** 2D Hydraulic Concealed Door Hinge

13 **X010** Silent Interiorl Door Lock

14 **WF063** Offset Axis Pivot Door System

15 **FS086** Cabinet Support

16 **MFL05** Visible Sliding Door System For Wardrobe

17 **W-A311** 180° Rotating Cabinet System

18 **DB5016T** 90° Island Extension Rotating Slide

01 HB319

Ultra-thin hydraulic hinge with cover



SPECIFICATIONS

Material: Iron
Cup Head: Big Cup Head / Small Cup Head
Specifications: Full cover / Half cover / Insert
Surface Treatment: Titanium
Opening Angle: 100°
Hinge Cup Diameter: Ø35mm
Cup Hole Depth: 14mm
Cup Hole Spacing: 24mm
Drilling Distance K: 3-7mm
Door Panel Thickness: 16-25mm
Base Height: H=0
3D Adjustment: Vertical ±2mm / Left/Right ±2.5mm / Depth ±3mm
Lifespan: 80,000 opening and closing cycles

产品参数

材质: 铁
铰杯类型: 大杯 / 小杯
规格: 全盖 / 半盖 / 内藏
表面处理: 钛金
开启角度: 100°
铰杯直径: Ø35mm
铰杯深度: 14mm
铰杯孔距: 24mm
钻孔距离 K: 3-7mm
门板厚度: 16-25mm
底座高度: H=0
三维调节: 垂直 ±2mm / 左右 ±2.5mm / 前后 ±3mm
使用寿命: 80,000次开合循环

02 HB310

Air hinge for aluminum frame & glass doors



SPECIFICATIONS

Material: Zinc alloy
Surface treatment: Gunmetal black / Black nickel plating
Opening angle: 105°
Door panel thickness: 18-32mm
Maximum door height: 2100mm
Maximum door width: 600mm
Load capacity: 25kg
Applications: Aluminum frame doors, glass doors, display cabinet doors, interior doors

产品参数

材质: 锌合金
表面处理: 枪黑色 / 黑镍电镀
开启角度: 105°
门板厚度: 18-32mm
最大门高: 2100mm
最大门宽: 600mm
承重能力: 25kg
适用范围: 铝框门、玻璃门、展示柜门、室内门

03 BT901

Soft Close Thin Metal Box



SPECIFICATIONS


Material: Galvanized iron + Cold-rolled iron
Color: Iron Grey / Pearlescent White
Length options: 300 / 350 / 400 / 450 / 500 / 550 mm
Side panel height: 68 mm (Low) / 151 mm (High)
 (Optional: Raised glass or square rail; quantity and height of square rails are customizable)
Load capacity: 35 kg (SGS certified); 80,000-cycle durability test
Compatible board thickness: 16 / 18 mm
Cutting formulas: Bottom panel width = Internal cabinet width (LW) - 56 mm $\pm$ 0.5;
 Back panel length = LW - 56 mm $\pm$ 0.5

产品参数

材质: 镀锌铁 + 冷轧铁
 颜色: 铁灰 / 珠光白
 长度规格: 300 / 350 / 400 / 450 / 500 / 550mm
 整帮高度: 68mm 低帮 / 151mm 高帮
 (可选加高玻璃、方杆; 方杆数量高度自由定制)
 承重: 35KG (SGS 认证), 8 万次抽拉测试
 适配板厚: 16 / 18mm
 裁切公式: 底板宽 = 柜内宽 LW - 56mm $\pm$ 0.5;
 背板长 = LW - 56mm $\pm$ 0.5

04 BF3318K

5D heavy duty cabinet drawer slides with Synchronize

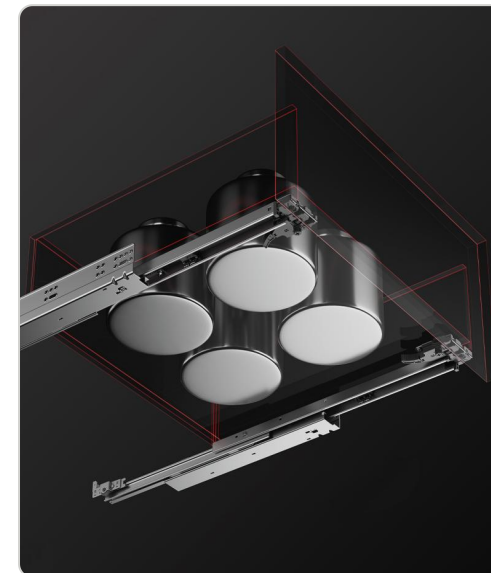

SPECIFICATIONS


Material: Cold-rolled steel + galvanized sheet (heavy-gauge steel)
Load capacity: 35 kg
Durability: Over 50,000 opening/closing cycles at 35 kg load; also passes 100,000-cycle heavy-duty fatigue test
Available lengths: 250 / 300 / 350 / 400 / 450 / 500 / 550 mm
Compatible panel thickness: 16mm/18mm
5D adjustment functions
 1D Vertical adjustment: +3 mm
 2D Lateral adjustment: $\pm$ 1.5 mm
 3D Depth adjustment: +4 mm (includes 3D adjustment handle)
 4D Force adjustment: 4-level spring resistance (+4% / +8% / +12% / +15%)
 5D Front panel adjustment: Adjustable panel tilt for optimized access to drawer contents

产品参数

材质: 冷轧钢 + 镀锌板 (加厚钢材)
 承重: 35KG
 寿命: 35KG 负载下开合 5 万次以上, 另有 10 万次超强疲劳测试
 规格长度: 250 / 300 / 350 / 400 / 450 / 500 / 550mm
 适配板厚: 16mm/18mm
5D 调节功能
 1D 上下调节: +3mm
 2D 左右调节: $\pm$ 1.5mm
 3D 前后调节: +4mm (配 3D 调节把手)
 4D 力度调节: 弹簧阻力 4 档 (+4% / +8% / +12% / +15%)
 5D 面板调节: 面板倾斜可调, 优化抽屉空间取用

05 B505K

3-Fold Soft Close Undermount Drawer Slide

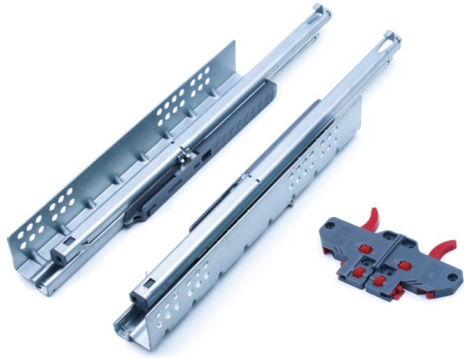

SPECIFICATIONS

Material: Galvanized

Rail Thickness: 1.4×1.4×1.4mm

Load Capacity: 35KG

Handle: 1D handle / 2D handle available

Specifications: 250 / 300 / 350 / 400 / 450 / 500 / 550mm

Suitable Plate Thickness: 16mm / 18mm

产品参数

材质：镀锌

滑轨厚度：1.4×1.4×1.4mm

承重：35kg


把手：可选配 1D 或 2D 把手

规格：250 / 300 / 350 / 400 / 450 / 500 / 550mm

适用板材厚度：16mm / 18mm

06 BF3331K

Synchronized Full-Extension Soft Close Undermount Drawer Slide

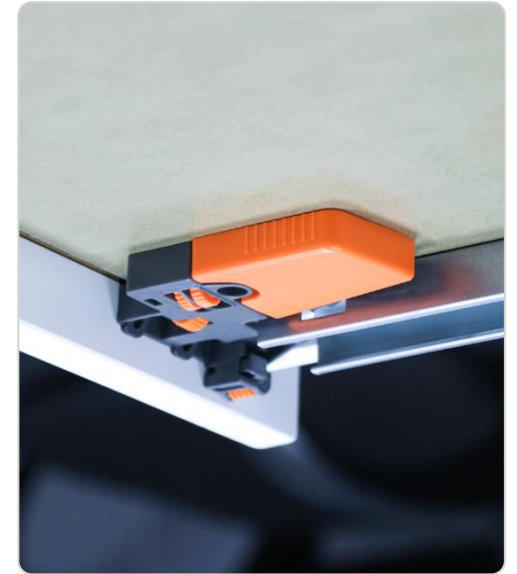

SPECIFICATIONS

Material: Iron, galvanized/black plated

Rail thickness: 1.0×1.8×1.8mm

Load capacity: 30KG

Dimensions: 300 / 350 / 400 / 450 / 500 / 550mm

Handle: 3D handle (orange-gray)

Compatible panel thickness: 16 / 18 mm(The

buffered edge fits 16 mm panels; the version

without the buffered edge fits 18 mm panels.)

产品参数

材质：铁，镀锌/黑色电镀

导轨厚度：1.0×1.8×1.8mm

承重：30kg


尺寸：300 / 350 / 400 / 450 / 500 / 550mm

把手：3D把手（橙灰色）

适配面板厚度：16 / 18mm（带缓冲边款适配16mm面板；无缓冲边款适配18mm面板）

07 M972

Adjustable Ghost Door System

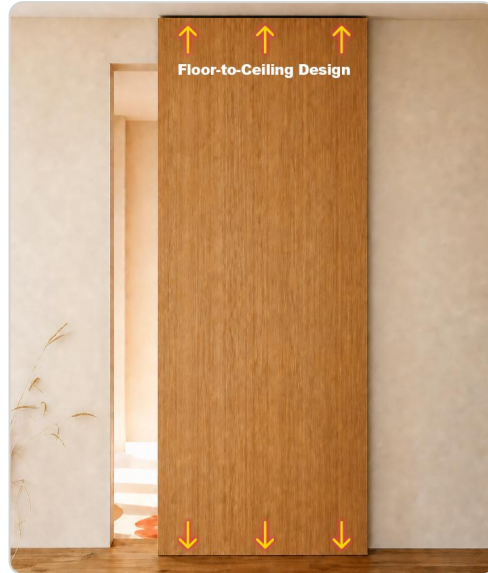

SPECIFICATIONS

Load Capacity: 2/4 wheel 60kg
Door-to-Ceiling Distance: Only 8mm (Regular model ≥ 50 mm)
Anti-jump Structure: Paddle-type anti-jump design
Up/Down Adjustment: Side adjustment, wrench adjustment 5mm
Wall Level Adjustment: 4-wheel model (2mm front/back micro-adjustment)
Rail Length: 1.2M / 1.5M
Packaging: Customizable color box, plastic seal, and logo
Door Gap: One-finger-width gap left on the side (avoiding the original door frame/switch/baseboard)
Ghost Lock: Indoor unlocking mechanism + external coin unlocking; key version available upon request

产品参数

承重能力：2轮/4轮 60kg
 门体至天花板间距：仅8mm（常规款 ≥ 50 mm）
 防脱轨结构：拨片式防脱轨设计
 上下调节：侧向调节，扳手调节（调节范围5mm）
 墙面垂直度调节：4轮款支持（前后2mm微调）
 轨道长度：1.2m / 1.5m
 包装：支持定制彩盒、塑封及Logo印制
 门体间隙：侧面预留一指宽间隙（避开原有门框、开关或踢脚线）
 隐形锁：室内解锁机构 + 室外硬币解锁；
 可按需提供钥匙锁版本

08 BS07

Monoraol Flush Sliding Door System



SPECIFICATIONS

Material: Aluminum alloy
Door width: Standard 500–960mm | Wide 961–1210mm | Extra-wide 1211–1500mm (customization limit: 1500mm)
Door height: ≤ 3000 mm
Door thickness: 30–44mm (standard); 45–60mm (extra-thick; requires 140mm wide track)
Load capacity: 80kg
Track dimensions: Standard 120×60mm; Wide 140×60mm
Track length: = (Moving door panel width × 2) + 80mm; Track can be cut to fit door width
Installation method: Top-mounted track + side-mounted door panel; left or right opening; no bottom track
Applications/Clients: Interior doors, door manufacturers, whole-house custom furnishing providers, contractors

产品参数

材质：铝合金
 门宽规格：标配 500-960mm | 加宽 961-1210mm | 超宽 1211-1500mm（定制上限 1500mm）
 门高： ≤ 3000 mm
 门厚：30-44mm 常规；45-60mm 超厚（用加宽 140mm 轨道）
 承重：80KG
 轨道尺寸：常规 120×60mm；加宽 140×60mm
 轨道长度：= 活动门板宽 × 2 + 80mm 左右；
 轨道可裁切适配门宽
 安装方式：轨道顶装 + 门侧挂，分左右开，无下轨
 应用/客户：房门、门厂、全屋定制、工程商

09 M75G

Pocket Sliding Door System



SPECIFICATIONS

Material: Zinc alloy body + plastic components + aluminum cover

Finish: Zinc alloy body: metallic epoxy coating / Aluminum cover: anodized finish

Door thickness: 30-45MM

Min Door Width: 560MM

Loading: 60kg/90kg

产品参数

材质：锌合金主体 + 塑料组件 + 铝制盖板

表面处理：锌合金主体：金属质感环氧涂层 / 铝制盖板：阳极氧化处理

适用门厚：30-45mm

最小门宽：560mm

承重：60kg/90kg

10 TM037

Folding Wardrobe Door System



SPECIFICATIONS

Door height: ≤2600mm
Single door panel width: 400-600mm
Door thickness: 18-40mm
Single door panel weight: ≤20kg
Features: Equipped with bottom rollers; soft-close mechanism optional (4-panel bi-fold version includes soft-close mechanism; 2-panel bi-fold version does not include soft-close mechanism; available in left- and right-hand configurations)
Compatible tracks: Top track, surface-mounted bottom track, recessed bottom track (Top track: electrophoretic finish; bottom track: natural anodized aluminum finish)

产品参数

门高：≤2600mm
 单扇门宽：400-600mm
 门厚：18-40mm
 单扇门重：≤20kg
 特点：配下轮，可选配缓冲器（二折叠 4 扇门款配缓冲器；一折叠 2 扇门款不配缓冲器，分左右）
 配套轨道：上轨、明装下轨、暗装下轨（上轨电泳处理，下轨氧化铝本色）

11 HY602

Wooden Door Hydraulic Hinge



SPECIFICATIONS

Material:Aluminum

Finish:Matte black/Iron grey/ Silver/ Gold dust/AB/ Rose gold

Size:139x36x3xφ26.8mm/157.2x36x3xφ26.8mm

MAIN FEATURES:

- 1.Not distinguish the left and right installation
- 2.The full rolling shaft is interconnected, quiet, careful and more durable
- 3.Silent and locking function can be converted, more humane, safer
- 4.Turn off arbitrarily, install and use more conveniently
- 5.Efficient hydraulic system to ensure long -term use of oil without oil,soft,smooth

产品参数

主要材质:铝

表面处理:哑黑/铁灰/砂银/砂金/青古/玫瑰金

产品尺寸:139x36x3xφ26.8mm/157.2x36x3xφ26.8mm

主要特点:

- 1.不分左右安装,更省心,更方便。
- 2.全滚动轴承联接, 静音、精心、更耐用。
- 3.静音、入锁功能可转换, 更人性化, 更安全。
- 4.关闭力任意调整, 安装、使用更便利。
- 5.高效的液压系统, 保障长期使用不漏油, 柔和、顺畅

12 HBG005

2D Hydraulic Concealed Door Hinge



SPECIFICATIONS

Specifications: 194×30mm (155×25mm optional)

Max opening angle: 180°, 90° soft positioning, 90-180° arbitrary stop

Load capacity: 40KG per piece

Adjustment: Left/right ±2mm / Up/down ±4mm

No left/right distinction

Applicable wooden doors:

Door thickness: >38 mm; groove depth: 37 mm

Colors: 6 colors available:

Black/Gray/Silver/Gold/Antique Bronze/
Antique Red Bronze

产品参数

规格: 194×30mm (可选 155×25mm)

最大开启角度: 180°; 90°处柔和定位;
90°至180°范围内任意角度停留

承重能力: 40kg/个

调节范围: 左右±2mm / 上下±4mm

不分左右手


适用木门:

门厚: >38mm; 开槽深度: 37mm

颜色: 提供6种颜色——黑色/灰色/银色/金色/仿古青铜色/
仿古红铜色

13 X010

Silent Interior Door Lock

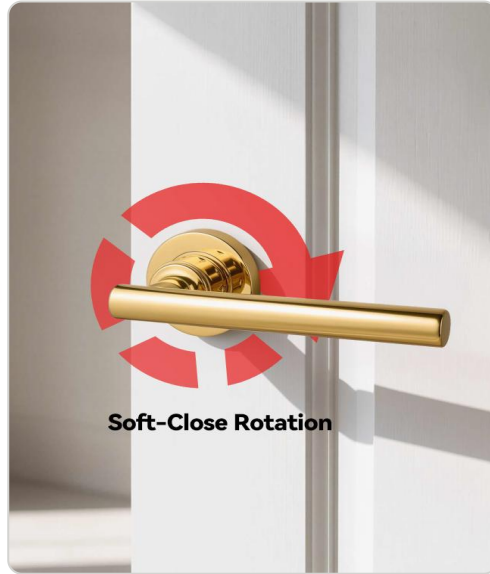

Soft-Close Rotation


SPECIFICATIONS

Material: Zinc alloy

Door Thickness: 38-50mm

Finish: Bright silver single color/Bright gold single color/Matte nickel single color/Glossy starry gray

Mortise lock case: Italian-style 60 mm screwless lock case




产品参数

材质：锌合金

适用门厚：38-50mm


表面处理：亮银单色/亮金单色/哑光镍单色/亮面星空灰

锁体：意大利风格60mm无螺丝锁体



14 WF063

Offset Axis Pivot Door System

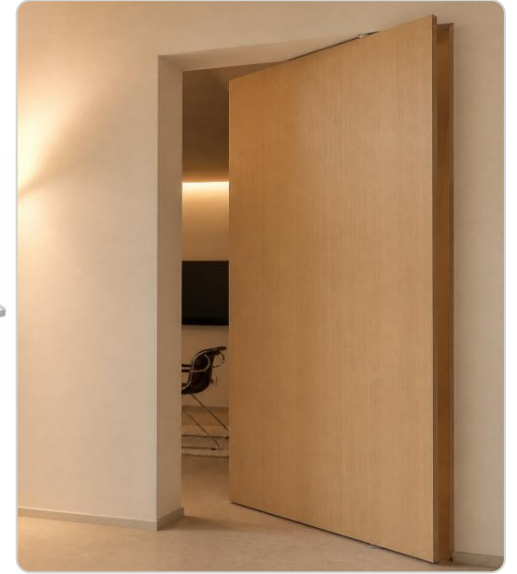

SPECIFICATIONS

Load Capacity: 60kg/100kg

Maximum Door Width: ≤800mm/≤1000mm

Travel Angle: 125°

Opening/Closing Method: Two-way opening and closing, 90° positioning

Grade: EN3/EN4

Material: 45# steel + SS304

Main Body Dimensions: 259×32×26mm

产品参数

承重能力：60kg/100kg

最大门宽：≤800mm/≤1000mm

运行角度：125°

启闭方式：双向启闭，90°定位

等级：EN3/EN4

材质：45#钢 + SS304不锈钢

主体尺寸：259×32×26mm

15 FS086

Cabinet Support



SPECIFICATIONS

Material: Steel

Finish: Nickel-Plated

Free stop at any position in opening angle about 30°

Door can soft close if used with soft hinges

Force can be adjusted by turning the inside screw

产品参数

主要材料: 铁

表面处理: 镀镍

柜门开启30°以上, 任意角度悬停


如配合缓冲铰链使用, 关门具有缓冲阻尼效果

通过旋转调节开关, 即可调节承重的大小

SIZE	QUANTITY REQUIRED	FORCE MOMENT(LF)	DOOR HEIGHT (MM)/CAPACITY(KGS)					
			300mm	350mm	400mm	450mm	500mm	550mm
Light	1 PCS	200-1000	0.6KG-3.3KG	0.5KG-2.8KG	0.5KG-2.5KG	0.4KG-2.2KG	0.4KG-2.0KG	0.3KG-1.8KG
	2 PCS	400-2000	1.2KG-6.6KG	1.0KG-5.6KG	1.0KG-5.0KG	0.8KG-4.4KG	0.8KG-4.0KG	0.6KG-3.6KG
Medium	1 PCS	400-1600	1.3KG-5.3KG	1.1KG-4.5KG	1.0KG-4.0KG	0.9KG-3.5KG	0.8KG-3.2KG	0.7KG-2.9KG
	2 PCS	800-3200	2.6KG-10.6KG	2.2KG-9.0KG	2.0KG-8.0KG	1.8KG-7.0KG	1.6KG-6.2KG	1.4KG-5.8KG
Heavy	1 PCS	850-2300	2.8KG-7.6KG	2.4KG-6.5KG	2.1KG-5.7KG	1.8KG-5.1KG	1.7KG-4.6KG	1.5KG-4.1KG
	2 PCS	1700-4600	5.6KG-15.2KG	4.8KG-13.0KG	4.2KG-11.4KG	3.6KG-10.2KG	3.4KG-9.2KG	3.0KG-8.2KG

16 MFL05

Visible Sliding Door System For Wardrobe

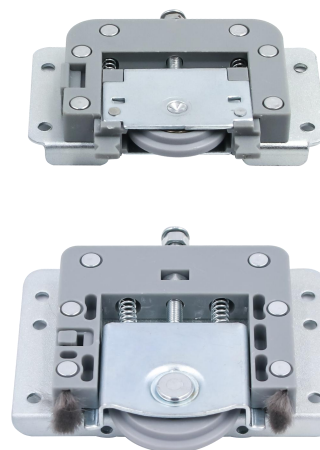

SPECIFICATIONS

Product Name: Surface-mounted soft-close sliding door rollers

Material: Alloy + Plastic

Color: Zinc-plated + Grey

Load Capacity: 40-50 kg

Wheel Type: Convex wheel (customizable color)

Compatible Aluminum Track: Double track

Standard 2-door configuration: 4 top rollers + 4

bottom rollers + 4 soft-close units

Soft-close units available in short and long versions

产品参数

品名: 明装式移门缓冲轮

材质: 合金 + 塑料

颜色: 镀锌 + 灰色

承重: 40-50KG

轮子: 凸轮 (可定制颜色)

配套铝材: 双轨

常规两门配置: 4 上轮 + 4 下轮 + 4 根缓冲器

缓冲器分短款 / 长款

17 W-A311

180° Rotating Cabinet System



SPECIFICATIONS

Product Name: 180° Rotating Cabinet System

Material: Aluminum + Steel / Galvanized Steel

Dimensions: 400×400 / 500×500 / 600×600 mm
(three size options)

Rotation Angle: 180°

Load Capacity: 80 kg

Maximum Cabinet Installation Height: 1600 mm

Applications: Wardrobes, display cabinets, kitchen storage, corner cabinets

产品参数

品名：180°旋转柜系统

材质：铝 + 钢 / 镀锌

尺寸：400×400 / 500×500 / 600×600mm（三档可选）

旋转角度：180°

承重：80kg

最大柜体安装高度：1600mm

应用场景：衣柜、展示柜、厨房收纳、转角柜

18 DB5016T

90° Island Extension Rotating Slide



SPECIFICATIONS

Material: Aluminum alloy

Color: Black

Load capacity: 120 kg

Cabinet width: Customizable (300–3000 mm)

Turntable width: 155 mm

Applications: Dining tables, kitchen islands, multifunctional furniture

产品参数

材质：铝合金

颜色：黑色

承重：120KG

柜宽尺寸：300-3000MM可定制

转盘155MM宽

应用场景：餐桌、岛台、多功能家具



Inspiring Hardware Globally

MEET US AT CANTON FAIR

广交会，期待与您见面

Furniture, cabinet and door manufacturers

家具、橱柜及门类制造商

Hardware importers & distributors

五金进口商与经销商

CONTACT

Tel: +86 13917197697

Email: info@shtemax.cn

Website: www.cabinetaccessory.com

联系我们

Tel: +86 13917197697

Email: info@shtemax.cn

Website: www.cabinetaccessory.com

